

BROACHING UNITS

For CNC Lathes




Main Features

- > Adaptable to any machine.
- > Slotting operations in extremely short times and excellent surface finish.
- > Internal or external machining by inverting the direction of motorized rotation in the turret.
- > Tool retraction movement (0.35 / 0.4 mm).
- > System for alignment ($\pm 0.5\text{mm}$) and longitudinal ($\pm 3^\circ$) corrections.
- > Prismatic coupling to ensure maximum rigidity.
- > Standard 1:1 Ratio. Available with reducer system.
- > Internal coolant through optional.
- > Internal lubrication.



Internal Coolant through (optional)

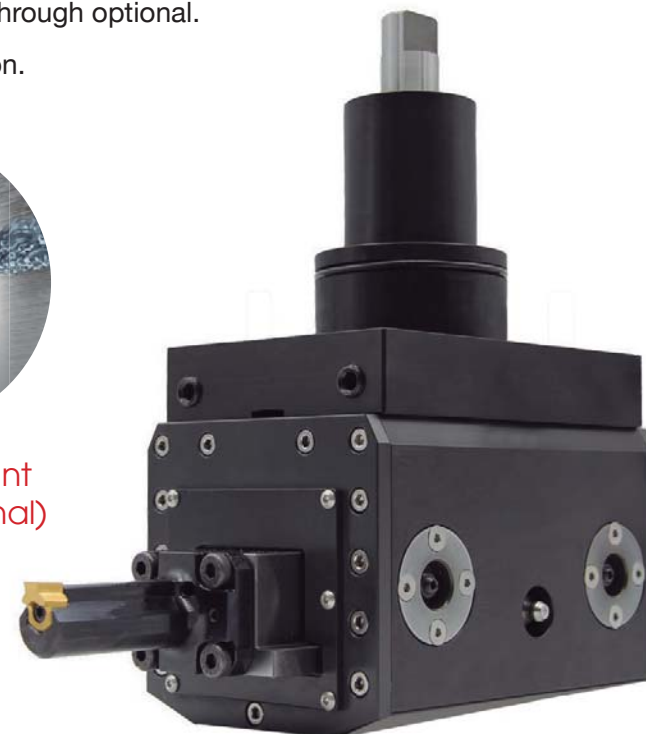

- Available for:
- ACCUWAY
 - BARUFFALDI
 - BIGLIA
 - BOEHRINGER
 - CMZ
 - COLCHESTER
 - DMG
 - DUPLOMATIC
 - DOOSAN
 - EMAG
 - EMCO
 - ERGOMAT
 - FAMAR
 - FAMOT
 - FEMCO
 - GEMINIS
 - GILDEMEISTER
 - GOODWAY
 - GURUTZPE
 - HAAS
 - HARDINGE
 - HEID
 - HERNAULT
 - HESSAPP
 - HITACHI-SEIKI
 - HURCO
 - HYUNDAI-WIA
 - HWACHEON
 - INDEX
 - JOHNFORD
 - JINN-FA
 - KUMMER
 - LEADWELL
 - MAGDEBURG
 - MAZAK
 - MHP
 - MORI SEIKI
 - MURATEC
 - NAKAMURA
 - OKUMA
 - RIKA
 - ROMI
 - SAUTER
 - SCHERER
 - SMEC
 - SOMAB
 - SONIM
 - SPINNER
 - TAKAMAZ
 - TAKANG
 - TAKISAWA
 - TECHNO
 - TRAUB
 - VICTOR
 - WELE
 - WEILER
 - YMC

Models: BU.060 / 061 / 062 / 063 .C25 .C35 .C50 .C65

Useful Stroke mm 25 35 50 65

Tool retraction movement mm 0.35 / 0.4

Type of Tools

Available for every processing need, easily replaceable.

Possibility of sharpening and coating according to the material to be worked / cut.



High quality inserts in sintered steel and carbide.

Standard and special inserts.

Type of works

Internal Processing M03 / External Processing M04

